


The latest innovation in osmometry for clinical labs.



# The Osmo1® value.

## Your laboratory deserves best-in-class technology.

Introducing the Osmo1 Single-Sample Micro-Osmometer. Osmo1 is ideally suited for clinical laboratories that prefer to directly draw and test small sample volumes and are looking for an osmometer that offers ease of use, accurate and precise results, and the security and efficiency of electronic data management.

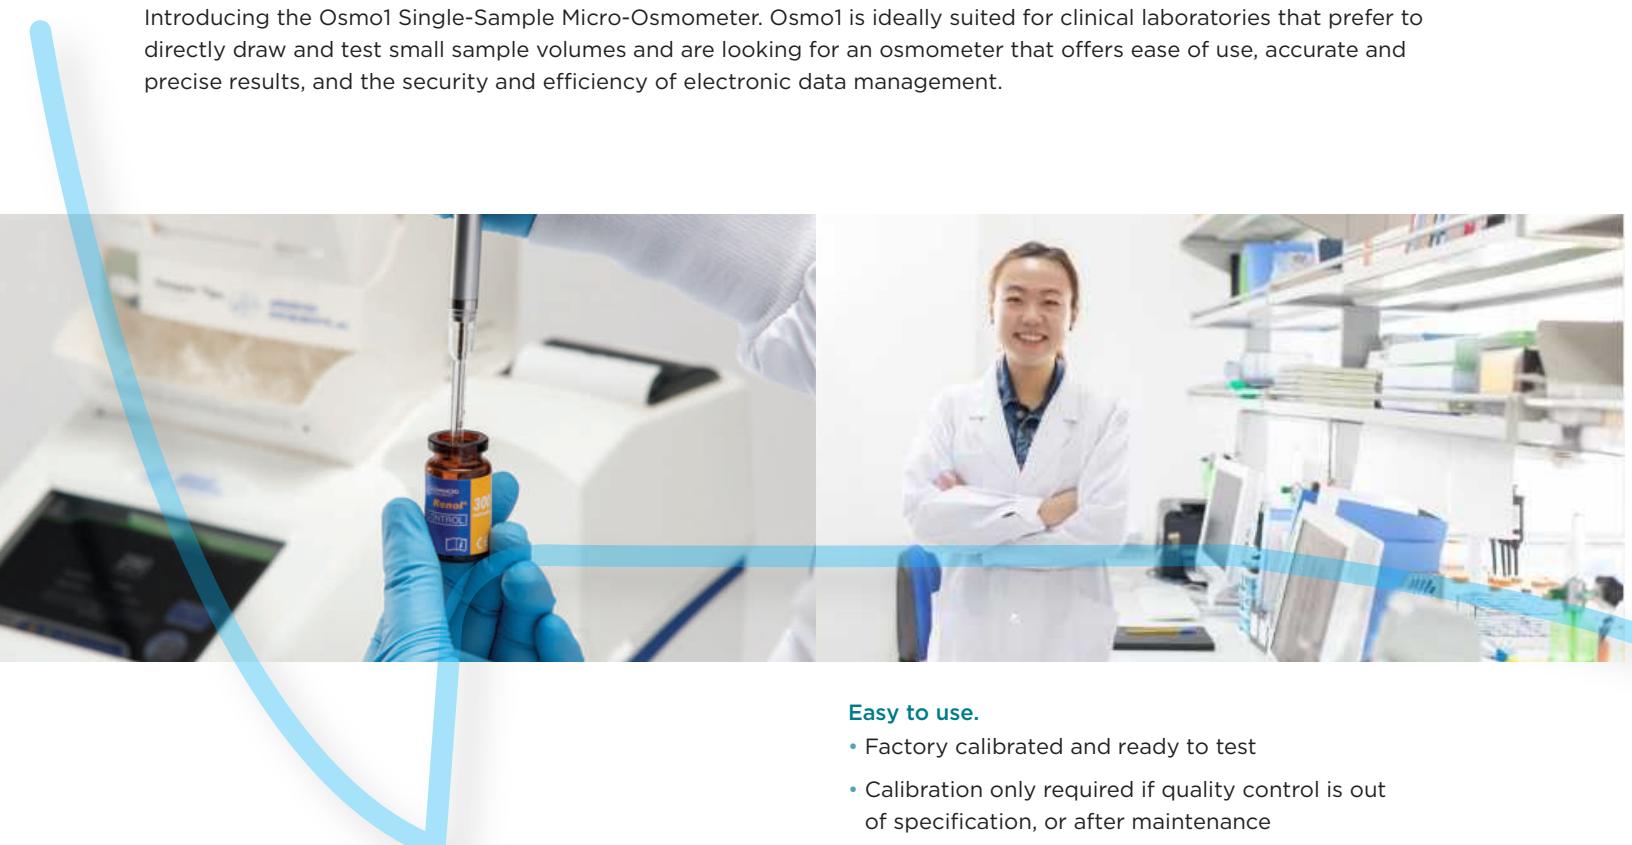

### Easy to use.

- Factory calibrated and ready to test
- Calibration only required if quality control is out of specification, or after maintenance
- One-step direct sampling, simply aspirate sample and load sampler into the instrument
- Fast, 90-second test time
- Color-coding, in combination with on-screen messages, provides clear indication of instrument status

### Flexible and convenient workflow.

- Only requires 20 µL of sample
- Selectable 2- or 3-point calibration to satisfy CLIA calibration verification requirement
- Operating range up to 2,000 mOsm/kg H<sub>2</sub>O to cover all of the samples your laboratory may encounter
- Replacement sampler plunger wire included with every Micro-Sample Test Kit to optimize instrument performance

## Why osmolality determination matters.

Osmolality is a fundamental measurement of the total solute concentration of body fluids including whole blood, serum, plasma, urine, feces, sweat, and tissue homogenate, and it is directly related to osmotic pressure. Osmotic pressure is of vital importance in biology as it relates to fluid balance, nutrient transfer, and waste removal processes in cellular organisms.


## The value of osmolality testing in clinical laboratories.

Osmolality is a valuable clinical tool used in the diagnosis and treatment of patients. It is a quick and effective test to help evaluate the body's water balance or its ability to produce and concentrate urine, investigate low sodium levels (hyponatremia), detect the presence of toxins in the body, and monitor osmotically active drug therapies such as mannitol, used to treat cerebral edema. It can also help monitor the effectiveness of a treatment for a condition found to be adversely affecting a person's osmolality.



## Why freezing point depression is the preferred method.

There are many methods for measuring concentration of solutions including: specific gravity, refractive index, and conductivity. Freezing point osmolality, however, is the only method which is truly independent from the size, shape, and other physical characteristics of the liquid solution. This is why freezing point depression is the industry-preferred solution and the gold standard in clinical laboratories around the world.

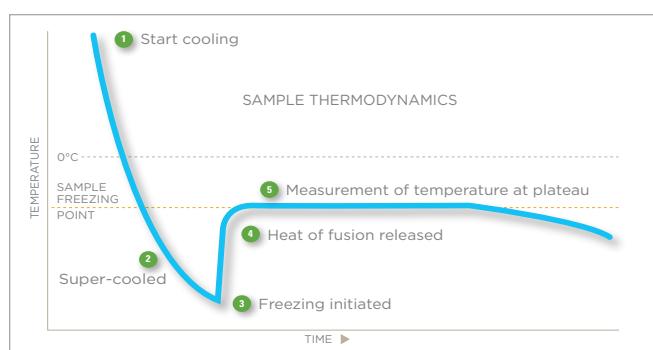

## Theory of freezing point depression for osmolality determination.

Advanced Instruments' osmometers utilize the industry preferred freezing point depression method to determine the osmolality of body fluids. When solutes (particles) are dissolved in a solvent (water), the freezing point of the solution is lowered compared to that of the solvent alone. As more solute is added, the freezing point decreases further. Therefore, by precisely measuring the freezing point of the solution, the osmolality (i.e. concentration) can be determined. Freezing point osmometry can ascertain volatiles in solutions such as  $\text{CO}_2$ , ammonia, and alcohol unlike vapor pressure osmometry.

The industry standard for osmometers. Worldwide.



#### Integrated barcode scanner

Built-in barcode scanner allows for traceable sample identification and reduces transcription errors

#### Touchscreen

Intuitive, color-coded menu-driven operating system, with multi-language capability, displays test results and enables enhanced data management

#### Ethernet and USB ports (located on the back of the instrument)

Allows for easy LIS connectivity and export of data

#### Consumable box

Micro-Sample Test Kit fits in accessory compartment to maximize available bench space and make sampler tips and cleaners easily accessible. Includes replacement plunger wire for optimal performance

#### Onboard printer

For easy printing and archiving of test results

#### Freezing chamber (located inside)

Hinged cover provides easy access to solenoid for maintenance

#### Ease-Eject™ Sampler

Convenient sample introduction, eliminates loss of sample

#### Onboard sampler holder

Convenient place to store sampler when not in use

#### Operating cradle

Guides sampler into freezing chamber


Easy to use with one-step direct sampling.

# Secure and efficient electronic data management.




## Intelligent user interface.

- Interactive and intuitive touchscreen with a menu-driven operating system displaying test results, user ID, sample ID, date, time, test progress bar, instrument status, and errors
- Multi-language capability
- Sampler tip countdown for inventory management

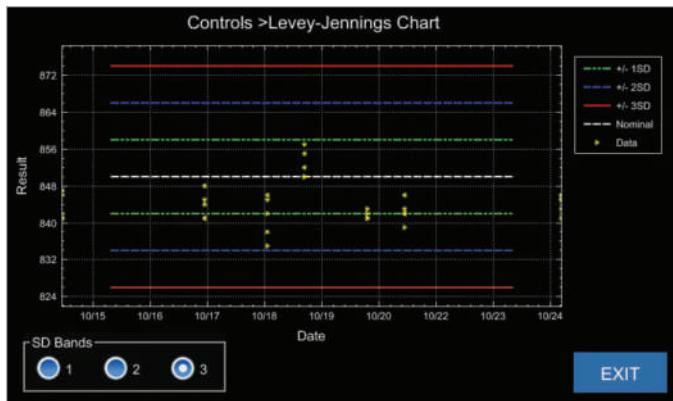

## Built-in quality control.

- Can issue warnings when quality control is out of range so users can react in real-time
- Allows tracking of quality control data over time with exportable Levey-Jennings chart
- Able to set custom range limits for QC samples
- Audit control ensured with events database
- Stores the last 1,000 test records and 10,000 events

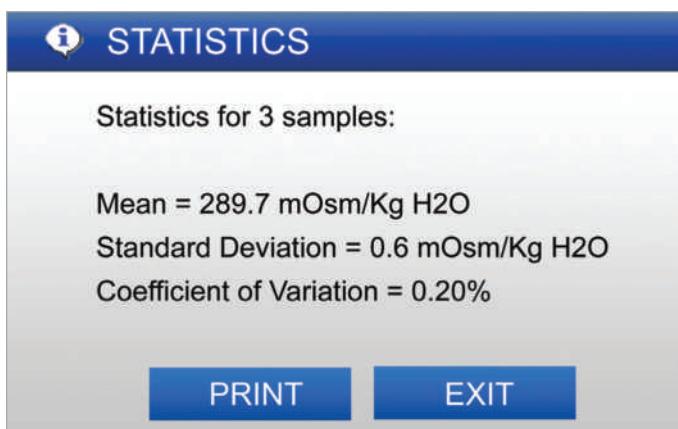

## Electronic data management for security and efficiency.

- Enables laboratories to comply with HIPAA regulations
- Password protected user accounts, with ability to link sample ID and user ID to test results, for improved traceability
- Supervisor login with ability to set restrictions and password expiry
- Bidirectional LIS via Ethernet connectivity
- Provides statistical analysis (mean, standard deviation, and coefficient of variation)
- USB for easy data export

Parts and supplies	
Part number	Description
<b>Instrument</b>	
OSMO1	Osmo1 Single-Sample Micro-Osmometer
<b>Osmometer calibration standards and reference solutions</b>	
3MA005	50 mOsm/kg calibration standard, 10x2 mL
3MA085	850 mOsm/kg calibration standard, 10x2 mL
3MA200	2000 mOsm/kg calibration standard, 10x2 mL
3MA029	Clinitrol™ 290 reference solution, 10x2 mL
3LA028	Osmolality linearity set, 5x2x5 mL
<b>Osmometer control solutions</b>	
3MA028	Protinol™ protein-based serum controls (3-Level, 3 mL vials)
3LA085	Renol™ urine osmolality controls (2-Level, 3 mL vials)
<b>Osmometer supplies and accessories</b>	
133800	Micro-Sample Test Kit: 500 tips, 500 cleaners, plunger wire
3M0825	20 µL Ease-Eject Sampler
FLA835	Thermal printer paper, 5/pkg



#### Optimal performance requires quality test supplies.

Advanced Instruments offers Protinol and Renol Controls which mimic serum and urine to ensure optimal system performance and accurate test results. Renol and Protinol satisfy CAP requirement that laboratories run two controls at two different concentrations daily or with each batch of samples and reagent.

#### Osmo1 Single-Sample Micro-Osmometer specifications<sup>1</sup>

<b>Specimen type</b>	Body fluids
<b>Sample volume</b>	20 ± 1 µL
<b>Test time</b>	90 seconds
<b>Sample capacity</b>	Single sample
<b>Units</b>	mOsm/kg H <sub>2</sub> O
<b>Resolution</b>	1 mOsm/kg H <sub>2</sub> O
<b>Range</b>	0 to 2000 mOsm/kg H <sub>2</sub> O
<b>Accuracy<sup>2</sup></b>	0 to 400 mOsm/kg H <sub>2</sub> O: ≤ 2 mOsm/kg H <sub>2</sub> O from nominal value (1 SD) > 400 to < 1500 mOsm/kg H <sub>2</sub> O: ≤ 0.5% mOsm/kg H <sub>2</sub> O from nominal value (1 SD) ≥ 1500 to 2000 mOsm/kg H <sub>2</sub> O: ≤ 1% mOsm/kg H <sub>2</sub> O from nominal value (1 SD)
<b>Precision<sup>2</sup></b>	(within run) 0 to 400 mOsm/kg H <sub>2</sub> O: Standard deviation ≤ 2 mOsm/kg H <sub>2</sub> O > 400 to < 1500 mOsm/kg H <sub>2</sub> O: Coefficient of variation ≤ 0.5% mOsm/kg H <sub>2</sub> O ≥ 1500 to 2000 mOsm/kg H <sub>2</sub> O: Coefficient of variation ≤ 1% mOsm/kg H <sub>2</sub> O
<b>Temperature effects<sup>3</sup></b>	Less than 1 mOsm/kg H <sub>2</sub> O per 5°C (9°F) ambient temperature change
<b>Communications</b>	Onboard printer, USB 2.0 Type A ports (2), USB 2.0 Type B ports (1), Ethernet 10/100, RJ45 connector port (1)
<b>Supported languages</b>	Simplified Chinese, Czech, Danish, English, French, German, Greek, Italian, Japanese, Korean, Portuguese, Russian, Slovak, Spanish, Swedish, Turkish
<b>Storage temperature</b>	-20°C to +45°C (-4°F to +113°F)
<b>Electrical voltage</b>	100 to 240 VAC (50/60 Hz)
<b>Power consumption</b>	60 Watts
<b>Dimensions (D x W x H)</b>	38 cm x 36 cm x 38 cm (15" x 14" x 15") <sup>4</sup>
<b>Net weight</b>	6.0 kg (13.3 lbs.)
<b>Shipping weight</b>	11.4 kg (25 lbs.)
<b>Warranty</b>	One-year limited warranty on workmanship and parts



The quality management system governing the manufacturing of this product is ISO 13485 registered.

<sup>1</sup>Subject to change

<sup>2</sup>Accuracy and precision (within run) specifications apply to Advanced Instruments standards and reference solutions. Performance at Reference Conditions: 20°C to 25°C (68°F to 77°F); 40 to 60% relative humidity

<sup>3</sup>Operating Conditions: Temperature 18°C to 35°C (64°F to 95°F); 30 to 80% relative humidity (non-condensing)

<sup>4</sup>Dimensions when Micro-Sample Test Kit is on the instrument



Two Technology Way | Norwood, MA 02062  
For more information | 800-225-4034 | 781-320-9000  
aicompanies.com | info@aicompanies.com

©2019 Advanced Instruments. Advanced, Hot-Line, Clinitrol, Protinol, Renol, Ease-Eject, and Osmo1 are trademarks of Advanced Instruments. All other trademarks are the property of their respective companies.